



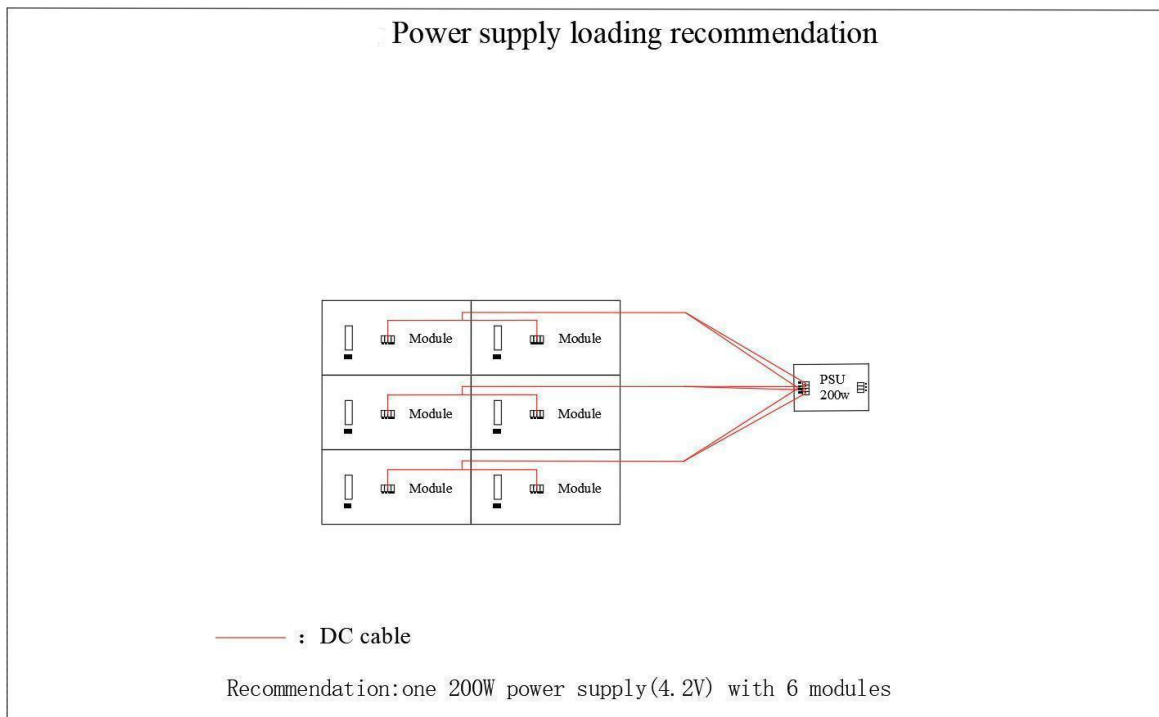

•Wiring Diagram of Data and Power

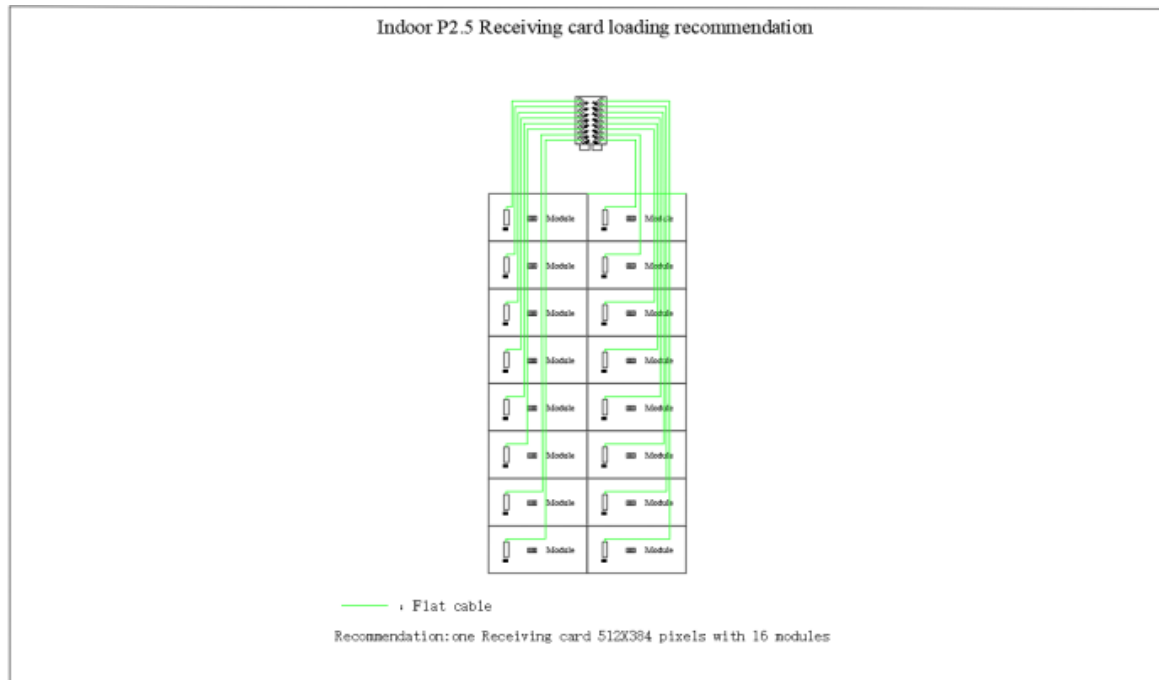

Remark:1. The recommended diagrams are for reference only.

2. The recommended cabinet size is 640X480 mm.

●Parameter of Indoor P2.5Series

	Parameter Name	Product Parameter
Module	LED Type	SMD2121
	Pixel Pitch	2.5mm
	Module Resolution (W×H)	128*64=8192Pixels
	HUB	HUB75
	Module Dimension	320mm×160mm×16.6mm
	Module Weight	0.46±0.02kg
Optical	Single-dot Brightness Calibration	Support
	White Balance Brightness	700 CD/m ²
	Standard Color Temperature	6500K (1000K ~ 9500K Adjustable)
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	3000:1
Electronic	Input Power <Max>	488W/m ²
	Input Power <Typical>	163W/m ²
	Power Supply Input Voltage	AC90 ~ 132V/ AC186 ~ 264V, Frequency 47-63 (Hz)
Performance	Frame Changing Frequency	60Hz
	Drive Mode	Constant Current Drive / 3 2 Scan
	Refresh Rate	3840Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	100000H
	Working Temperature/ Humidity Range (°C/RH)	-20°C~50°C / 10%~65%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-10°C~30°C / 10%~60%RH (No Condensation)

Remark: 1. The above parameters are typical or recommended
2. Product parameters or configuration adjustments without notice
3. Customized products, please confirm the parameters with our company