

X Smart Series

## Outdoor Rental LED Transparent Screen

**Model: X Smart P2.9** 



# **1** Outdoor Rental LED Transparent Screen Technical Parameter

1.1 Module composition		
Pixel composition	SMD 1921	
Pixel pitch (W*H)mm	2.9	
Module resolution (W*H)	128*16	
Module size (W*H*D)mm	500*125	
Module weight (KG)	0.37	

1.2 Unit composition		
Cabinet composition (W*H)	) 1*4	
Cabinet resolution (W*H)	128*64	
Cabinet size (W*H)mm	500*500	
Cabinet weight (kg)	5.7	
Cabinet area (m²)	0.25	
Pixel density (dot/m²)	112,896 pixels/m²	
Protection level	IP43 (indoor use)	
Cabinet flatness(mm)	≤1	
White balance brightness (	nits) 5500	
Color temperature (K)	6000—9300 adjustable	
View angle (°)	H:140° V:140°	
Luminous point center dist	ance deviation <0.3%	

#### 1.3 Cabinet and outer packaging

Total weight (KG/Cabinet+carton)	8 in 1 carton, 70KG
Outer packing size (L*W*H)	1100x690x742mm (L*W*H)

## 1.4 Electrical parameters Power consumption (A/unit module) DC 6~22

Peak power consumption (W/m²) 800

Average power consumption (W/m²) 320

Power requirements AC110-240V

#### 1.5 Processing performance


Drive mode	Constant current drive
Frame rate(Hz)	50&60
Refresh rate(Hz)@60Hz	≥3840

1.6 屏体使用参数	数	
Lifespan(hrs)		≥100,000
Working temperature (°C)		-30 — 60
Storage temperature (°C)		-30 — 60
Working humidity (RH) no	condensation	10 - 90%
Storage humidity (RH) no	condensation	10 - 95%
Screen thickness (mm)	Mod	dule+cabinet: 85
Defective ratio		<4/100000
Unit module splicing gap(r	mm)	Uniformity and ≤1
Best view distance (m)		> 5m
View angle (°)	Horizontal 14	10°, Vertical 140°
Surface flatness(mm)		Max tolerance≤1
Screen surface color	(white transpa	Uniformity 95% arent or teacolor)
Uniformity	Ü	ness uniformity of een reaches 95%

# 2 Screen Supporting Equipment Screen Supporting Equipment

2.1 Computer configuration requirements		
System	Windows 7 64bit、Windows 10 64bit、Windows 10 64bit.	
CPU	Intel Core i7 6200U	
CPU frequency	2.3GHz	
Maximum turbo frequency	2800MHz	
Number of cores/threads	Dual Core/Four Threads	
L3 cache	3MB	
Storage	4GB	
Memory type	DDR3L(Low voltage version)1600MHz	
Number of slots	2Xso-DIMM	
Maximum Storage	16GB	
Hard drive description	5400 rpm	
Screen technology	> 1366*768	
Graphics card type	Performance level discrete graphics card	
Memory capacity	2GB	
Wired network card	1000Mbps Ethernet card	
Data interface	3Xusb3.0	
Video interface	VGA、HDMI	

#### 500\*500MM Outdoor Rental LED Transparent Screen



Front view



Side(A/B)



Rear view

#### 500\*125MM Module



Module front view



Module rear view

## 4 Characteristics Of Outdoor Rental LED Transparent Screen


#### Migh transparency and high brightness

The transmittance can be as high as 80%, with strip structure design, ultra-thin and lightweight, and good light transmittance. The brightness is more than 5500cd/m².



#### Front service, New Architecture, Modular design

500x125mm module, 500x500mm cabinet size. With a stable and reliable structure with good heat dissipation. It supports multi-screen interaction and fast positioning.

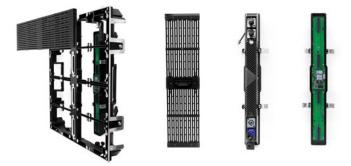

#### 👊 Ultra light and Ultra-thin

5.7kg/panel, 0.37kg/module, ultra light weight.

#### IP66 protection level, Perfect structure design

The lamp beads are filled with glue and the power box is sealed to ensure good waterproof performance and can be used normally in rainy days. Adopt high-permeability mask protection to avoid product collision and failure during transportation. Equipped with installation handles for easy lifting.

#### © Excellent cabinet design

Die-casting aluminum, strong toughness, no deformation.

### High-quality power supply and heat dissipation design

Without any additional auxiliary heat dissipation equipment, low carbon and environmentally friendly.





#### Fast Lock Design, Equipped with arc lock

Fast locking structure, high precision and reliability. Support arc-shaped, and special-shaped product solutions.

#### Standardized design


X Smart Series LED transparent screen is a standardized product for users in the rental field. Its products are: thin, transparent, simple in appearance, and support quick installation and removal.

#### 9 Short production cycle

As the future star of products in the rental field, adopt a standardized modular design concept and standardized cabinet size: 500\*500mm; with fast production cycle and short delivery time, they can meet all kinds of performing arts activities.

#### High protection structure

As a rental product that is frequently transported, installed and disassembled, high protection is essential. Corner guards are used to avoid product collision and failure during transportation and handling.

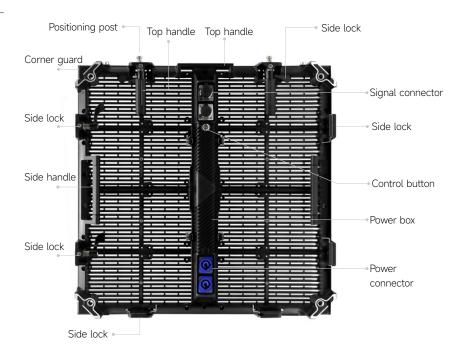



Solution

#### **Curved Installation**

In order to meet different needs, our X Smart Series is specially designed for curved installation.

-15° to +15°











Installation





Front installation Back installation

#### Carton size:

#### 1100x690x742mm

